ASSEMBLY INSTRUCTIONS

RAM PROMASTER 159" EXTENDED CARGO-HIGH ROOF

This document presents the detailed procedures for assembling Legend Fleet components and accessories.

Customers can make use these step-by-step procedures and easily assemble without major difficulty.





519 688 1043 customercare@legendfleet.com

56957 HWY 3 WEST, TILLSONBURG, ON N4G 4G8.



Table of Contents

Wheel Well Cover	3
Floor	4
Floor Sills	8
Wall Liners	10
Ceiling Liners	13
Top Sills	16
Door Liners	20

Wheel Well Cover

Parts and Hardware



DRIVER SIDE'S WHEEL WELL COVER



PASSENGER SIDE'S WHEEL WELL COVER



IMPRINT OF 'DRIVER' ON REAR SIDE, REPRESENTING DRIVER SIDE'S WWC



IMPRINT OF 'PASS' ON REAR SIDE, REPRESENTING PASSENGER SIDE'S WWC



Assembly Instructions

Floor and Wall liner must be Installed after the installation of Wheel well covers

Step 1: Place the **Driver side** and **Passenger side** wheel well covers in the vehicle, as shown below.





"positioning of Passenger side WWC"






"positioning of Driver side WWC"





Floor

Parts and Hardware

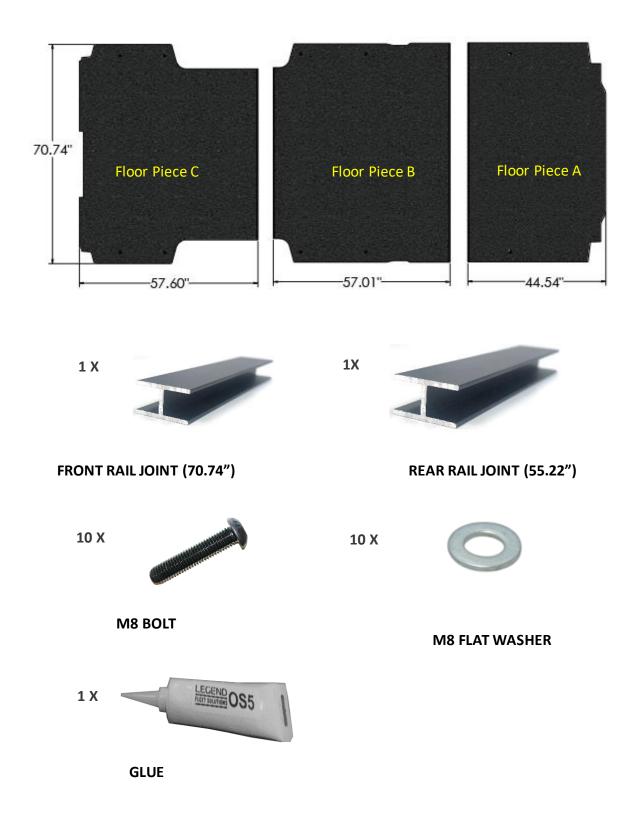

V0.1 Page **4** of **21**



Assembly instructions

Remove the following items before floor installation:

- 1. OEM Plastic Trim
- 2. D-Rings
- 3. Tie-Downs
- 4. Other installed parts


Apply a thin line of glue in both the grooves of the Rail Joints, that is supplied with Legend's floor.

Step 1: Install Floor Piece A, as shown below.



Figure 1

Step 2: Install the Parts in the following order after installing Floor Piece A as shown below.

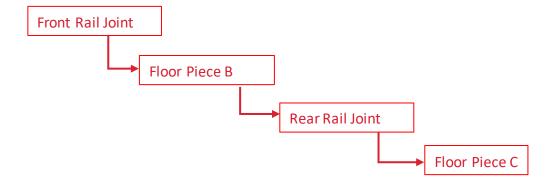

V0.1 Page **5** of **21**



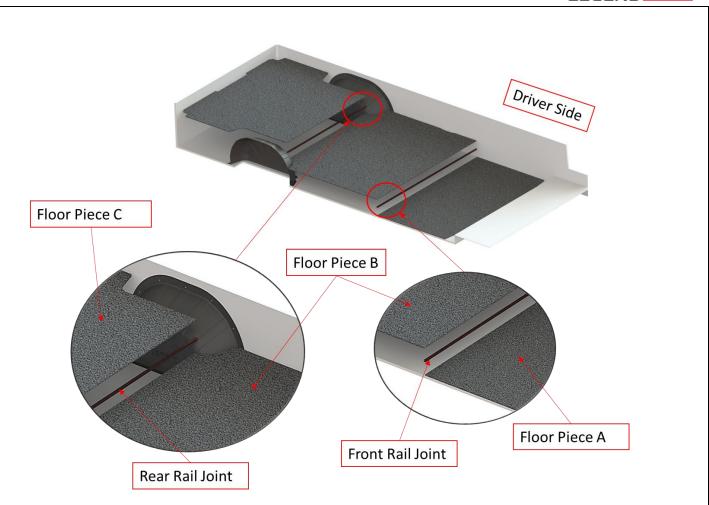


Figure 2

Step 3: Replace the OEM bolt in each D-Ring with combination of M8 Bolt and a flat washer as shown below.

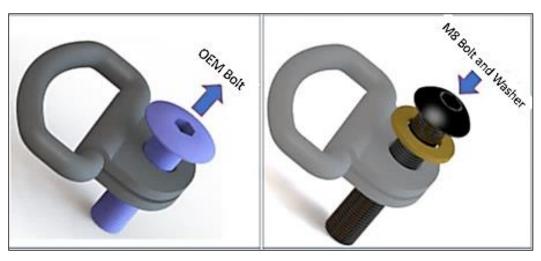


Figure 3

V0.1 Page **6** of **21**



Step 4: Re-install these modified D-Rings in the vehicle, thus completing the installation of Legend Floor.

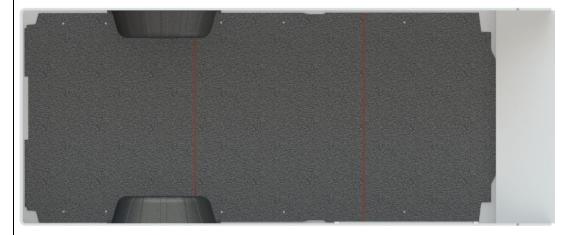






Figure 4
"Floor Installed" This view is from Inside of Van-Viewing from Top

V0.1 Page **7** of **21**



Floor Sills

Parts and Hardware



Assembly Instructions

Step 1: Position the Side Sill on Legend's Floor. Place the Pan Head Screws (3 Nos) to the Floor as shown below

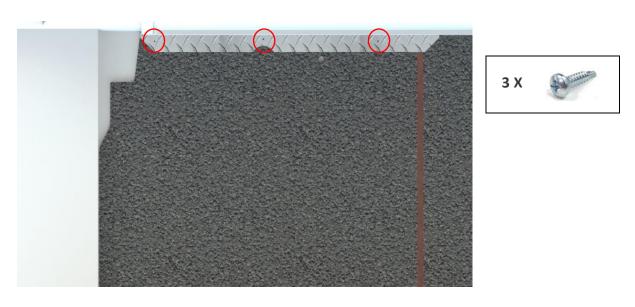


Figure 5 "Positioning and Fixing of the Side Sill"

V0.1 Page **8** of **21**



3 X

Step 2: Position the Rear Sill on Legend's Floor.




"Positioning and Fixing of the Rear Sill"
Figure 6

V0.1 Page **9** of **21**




Wall Liners


Parts and Hardware



DRIVER SIDE FRONT WALL LINER (D1A)

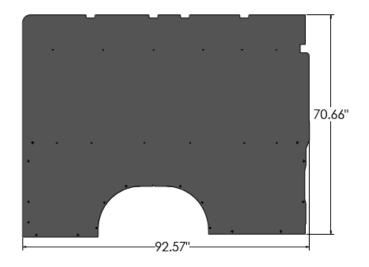

DRIVER SIDE REAR WALL LINER (D2A)



PASSENGER SIDE FRONT WALL LINER (P1A)



PUSH-IN RIVET



SCREW CAP



SELF-DRILLING SCREW

V0.1



Assembly Instructions

If Legend's Wheel Well Covers are used, the Wall Liner will lay over the Top Flange of Wheel Well Cover.

Hole Diameter (Ø) = 0.40"=



Hole Diameter (Ø) = 0.20"=

Step 1: Bring the (D1A) Liner into the vehicle and align the holes on the panel with the ones present on the vehicle's body.

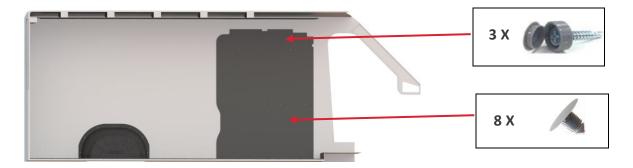


Figure 7

Step2: Bring the (D2A) Liner into the vehicle and align the holes on the panel with the ones present on the vehicle's body.

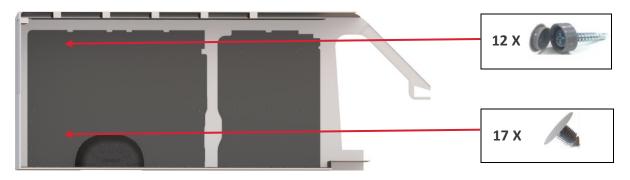


Figure 8

"Driver Side Front & Rear Wall Liner Installed" This is view from Inside of the Van-Viewing from Passenger Side

V0.1 Page **11** of **21**



Step 3: Bring the (P1A) Liner into the vehicle and align the holes on the panel with the ones present on the vehicle's body.

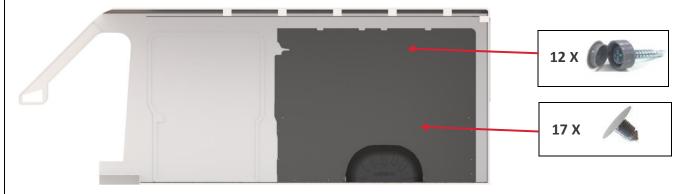


Figure 9


"Passenger Side Wall Liner Installed" This is view from Inside of the Van- Viewing from Driver Side

V0.1 Page **12** of **21**



Ceiling Liners

Parts and Hardware

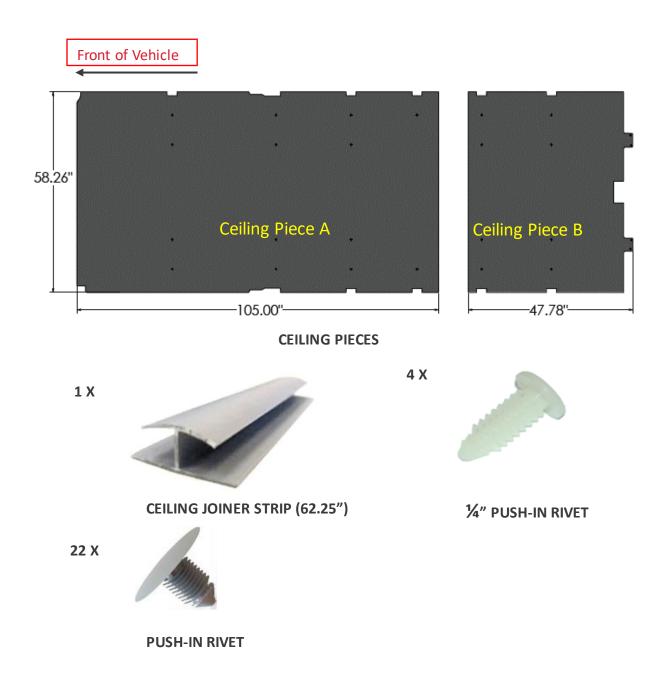


Assembly Instructions

Follow the below instructions for score lines on Rear surface of Ceiling Panel

Hole Diameter (Ø) = 0.40''= Hole Diameter (Ø) = 0.35"=





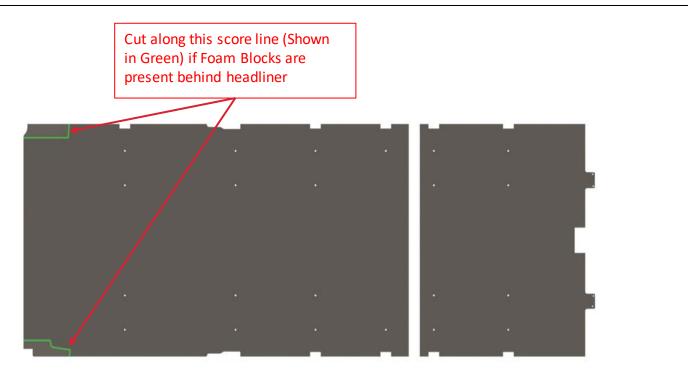

Step 1: Install Ceiling Piece A, as shown below.

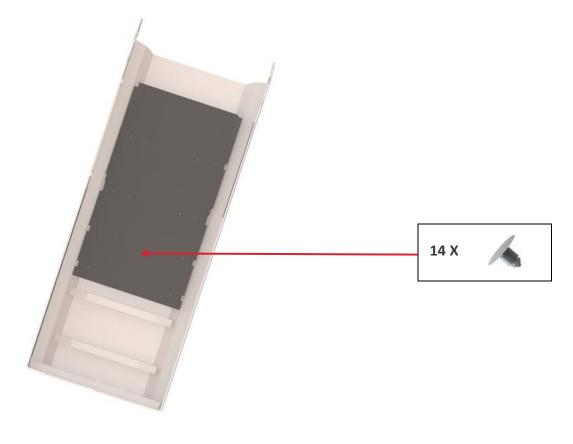


Figure 10

"Positioning and Fixing of the Ceiling Panel A" This View is from Inside of the Van

V0.1 Page **14** of **21**



Step 2: Install the Ceiling Joiner strip at the edge of the Front Ceiling panel

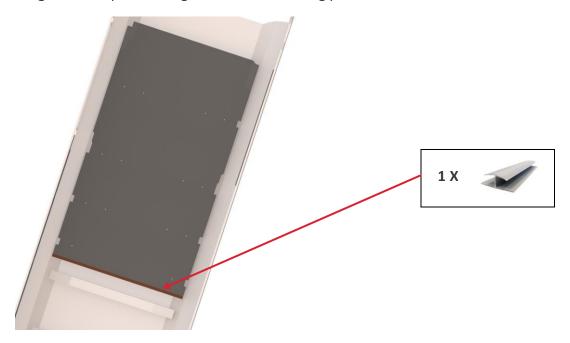


Figure 11

"Positioning and Fixing of the Ceiling Liner Strip" This View is from Inside of the Van

Step 3: Install Ceiling Piece B, as shown below. Ceiling liner.

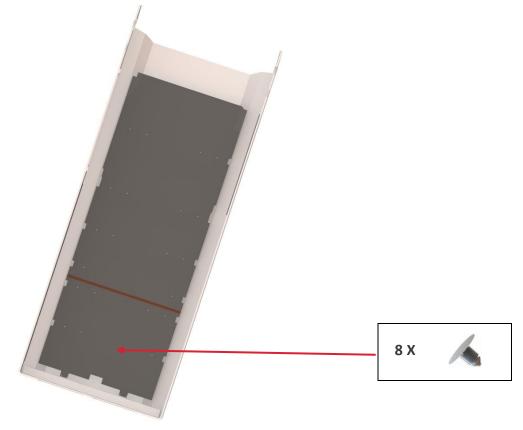


Figure 12

"Positioning and Fixing of the Ceiling Panel B" This View is from Inside of the Van

V0.1 Page **15** of **21**



Step 4: Fasten the Ceiling to the rear ring frame of the vehicle, as shown below.

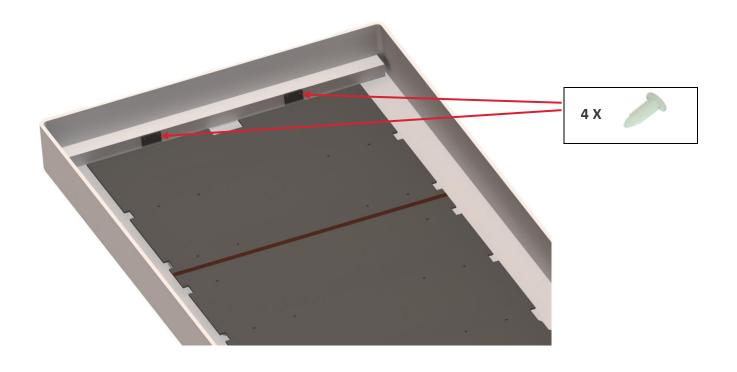


Figure 13

"Positioning and Fixing of the Ceiling panel" This View is from Inside of the Van


Step 5: This completes the installation of your Legend Ceiling Liner.

V0.1 Page **16** of **21**



Top Sills

Parts and Hardware

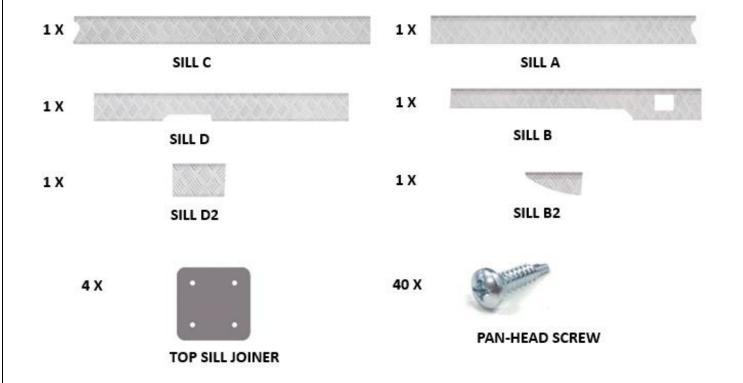

V0.1 Page **17** of **21**



Assembly Instructions

Assembly of the Top Sills is to be done outside of the Van before installing it in the Van.

Step 1: Assemble Driver Side sill – C, D, D2 as shown below.


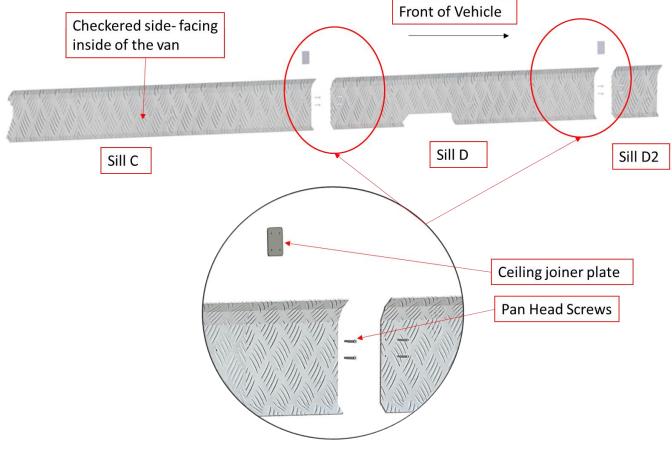


Figure 14


Step 2: Fasten assembled sills in the Van.



V0.1 Page **18** of **21**

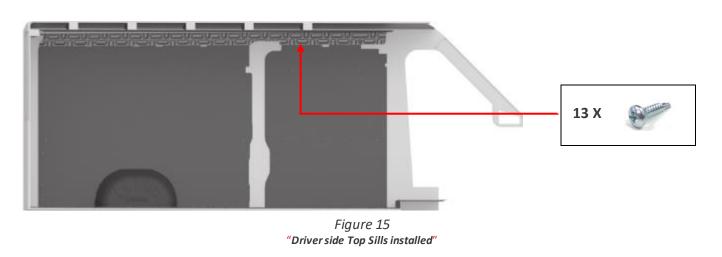

Step 3: Assemble Passenger Side Sill – A, B, B2 as shown below.

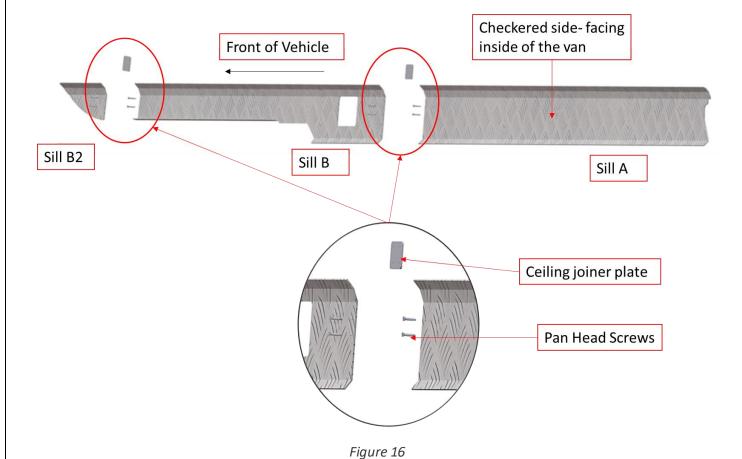

Step 4: Fasten assembled sills in the Van.

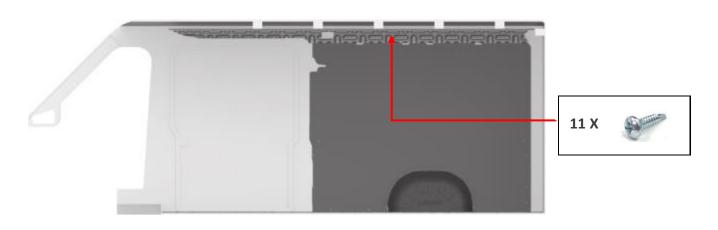


Figure 17
"Passenger side Top Sills installed"


Step 5: Fasten assembled sills in the Van.

V0.1 Page **19** of **21**




Door Liners


Parts and Hardware




DRIVER SIDE REAR DOOR LINER(DRA)



PASSENGER SIDE SLIDING DOOR LINER (PSA)



PASSENGER SIDE REAR DOOR LINER(PRA)

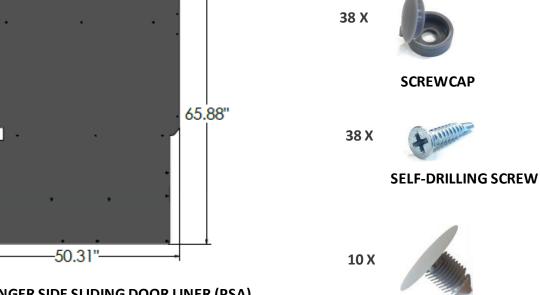

PUSH-IN RIVETS

V0.1 Page **20** of **21**



Assembly Instructions

Van Doors MUST be in close Position When Installing Door Liners.

Hole Diameter (Ø) = 0.40"=



Hole Diameter (Ø) = 0.20"=

Step 1: Rear Door Assembly.

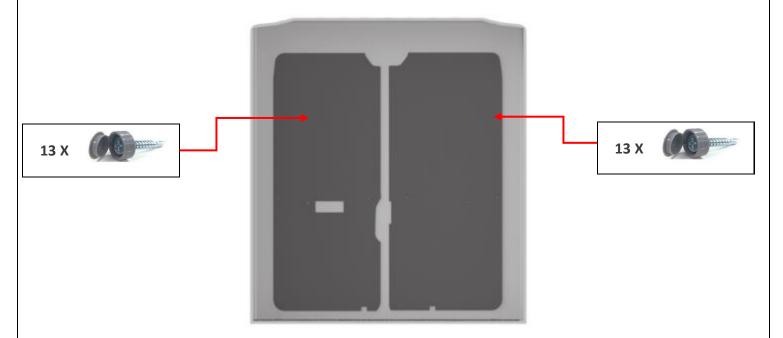


Figure 18
"Rear Door Liners Installed"

Step 2: Side Door Assembly.

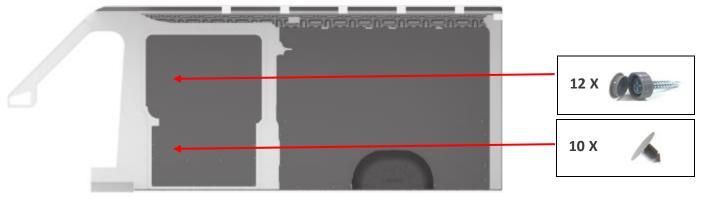


Figure 19

"Passenger Side Sliding Door Liner Installed"

Step 3: Installation of your Legend Door Liners is now complete.

V0.1 Page **21** of **21**